


QuikProtect



QuikProtect is perfect for

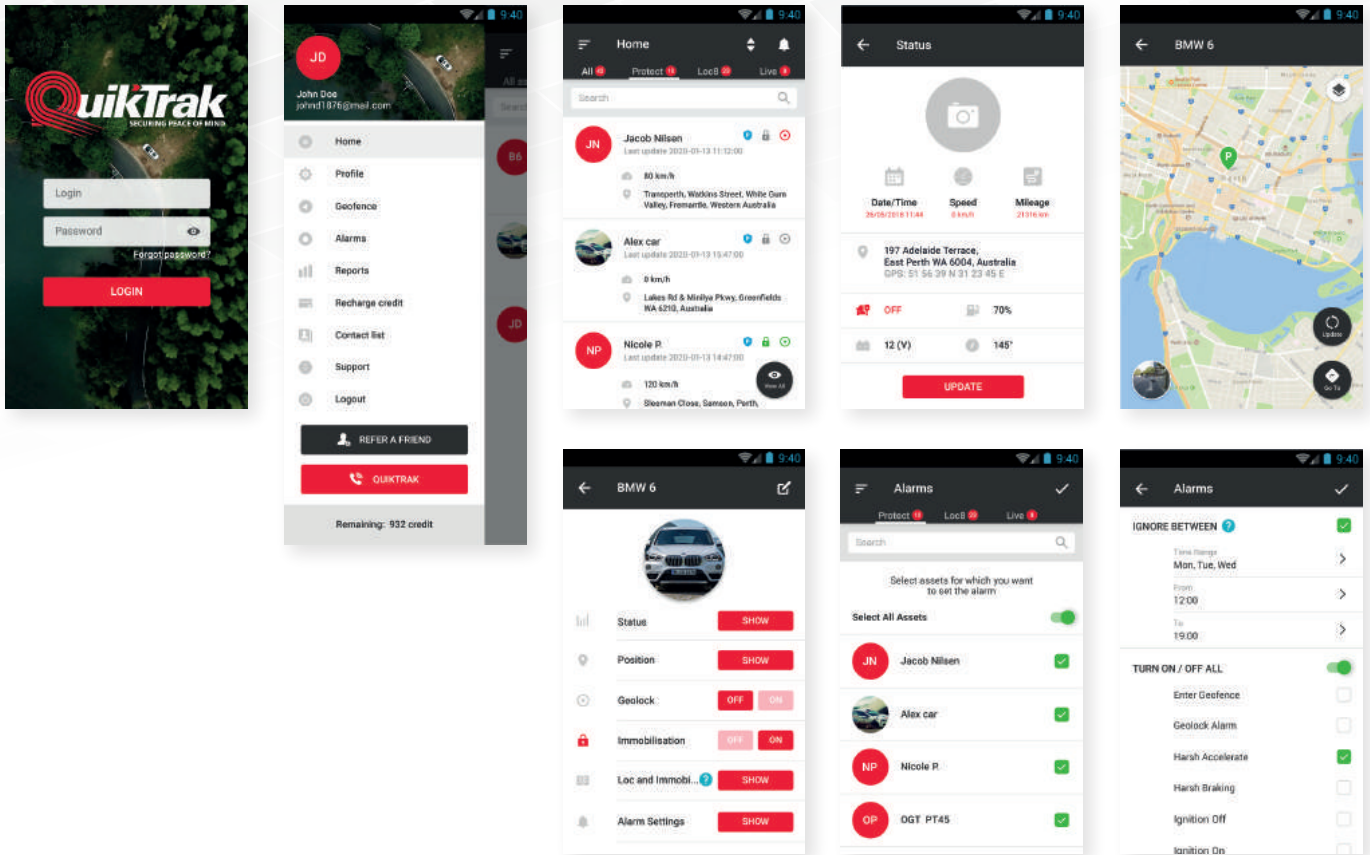

trucks



cars




motorbikes



machinery



trailers



boats

Features

- Once a day location and status update
 - Location, status, speed and input states
- Intuitive smart phone and web access
 - IOS and ANDROID compatible – See app stores
 - Cloud based web interface
 - Multi mapping interface – Google, Open source, Bing and street view mapping available
- Australian designed and supported
 - Online and in-app support
 - 24-month hardware warranty
 - Theft recovery assistance
- Alarms and input options – Real time notifications via in-app notice
 - Ignition state
 - Battery level and connectivity
 - Negative alarm input
 - Positive PTO/Switch input
 - Extended battery OR additional input
- Geolock

Device Specification

- 3G WCDMA Band
 - B1
 - B2
 - B5
 - B8
- 4G LTE BAND
 - FDD (B1,B2,B3,B4,B5,B7,B8, B28)
 - TDD (B40)
- Voltage range
 - 9-72V
- GPS Band
 - L1-Band 1575MHz
- Working Temperature and Humidity
 - -20°C~75°C; 20%~90% RH
- Work Current
 - GPRS(500mA);
 - WCDMA(700mA);
 - LTE(800mA)
- Dimensions (mm)
 - 89(L) X 37(W) X 12(H)
- Net Weight
 - 46g
- Standby Current Power
 - Off (20uA)
 - Sleep (3mA)
 - Idle (22mA)

Wiring Diagram and Explanation

